


J.F.K

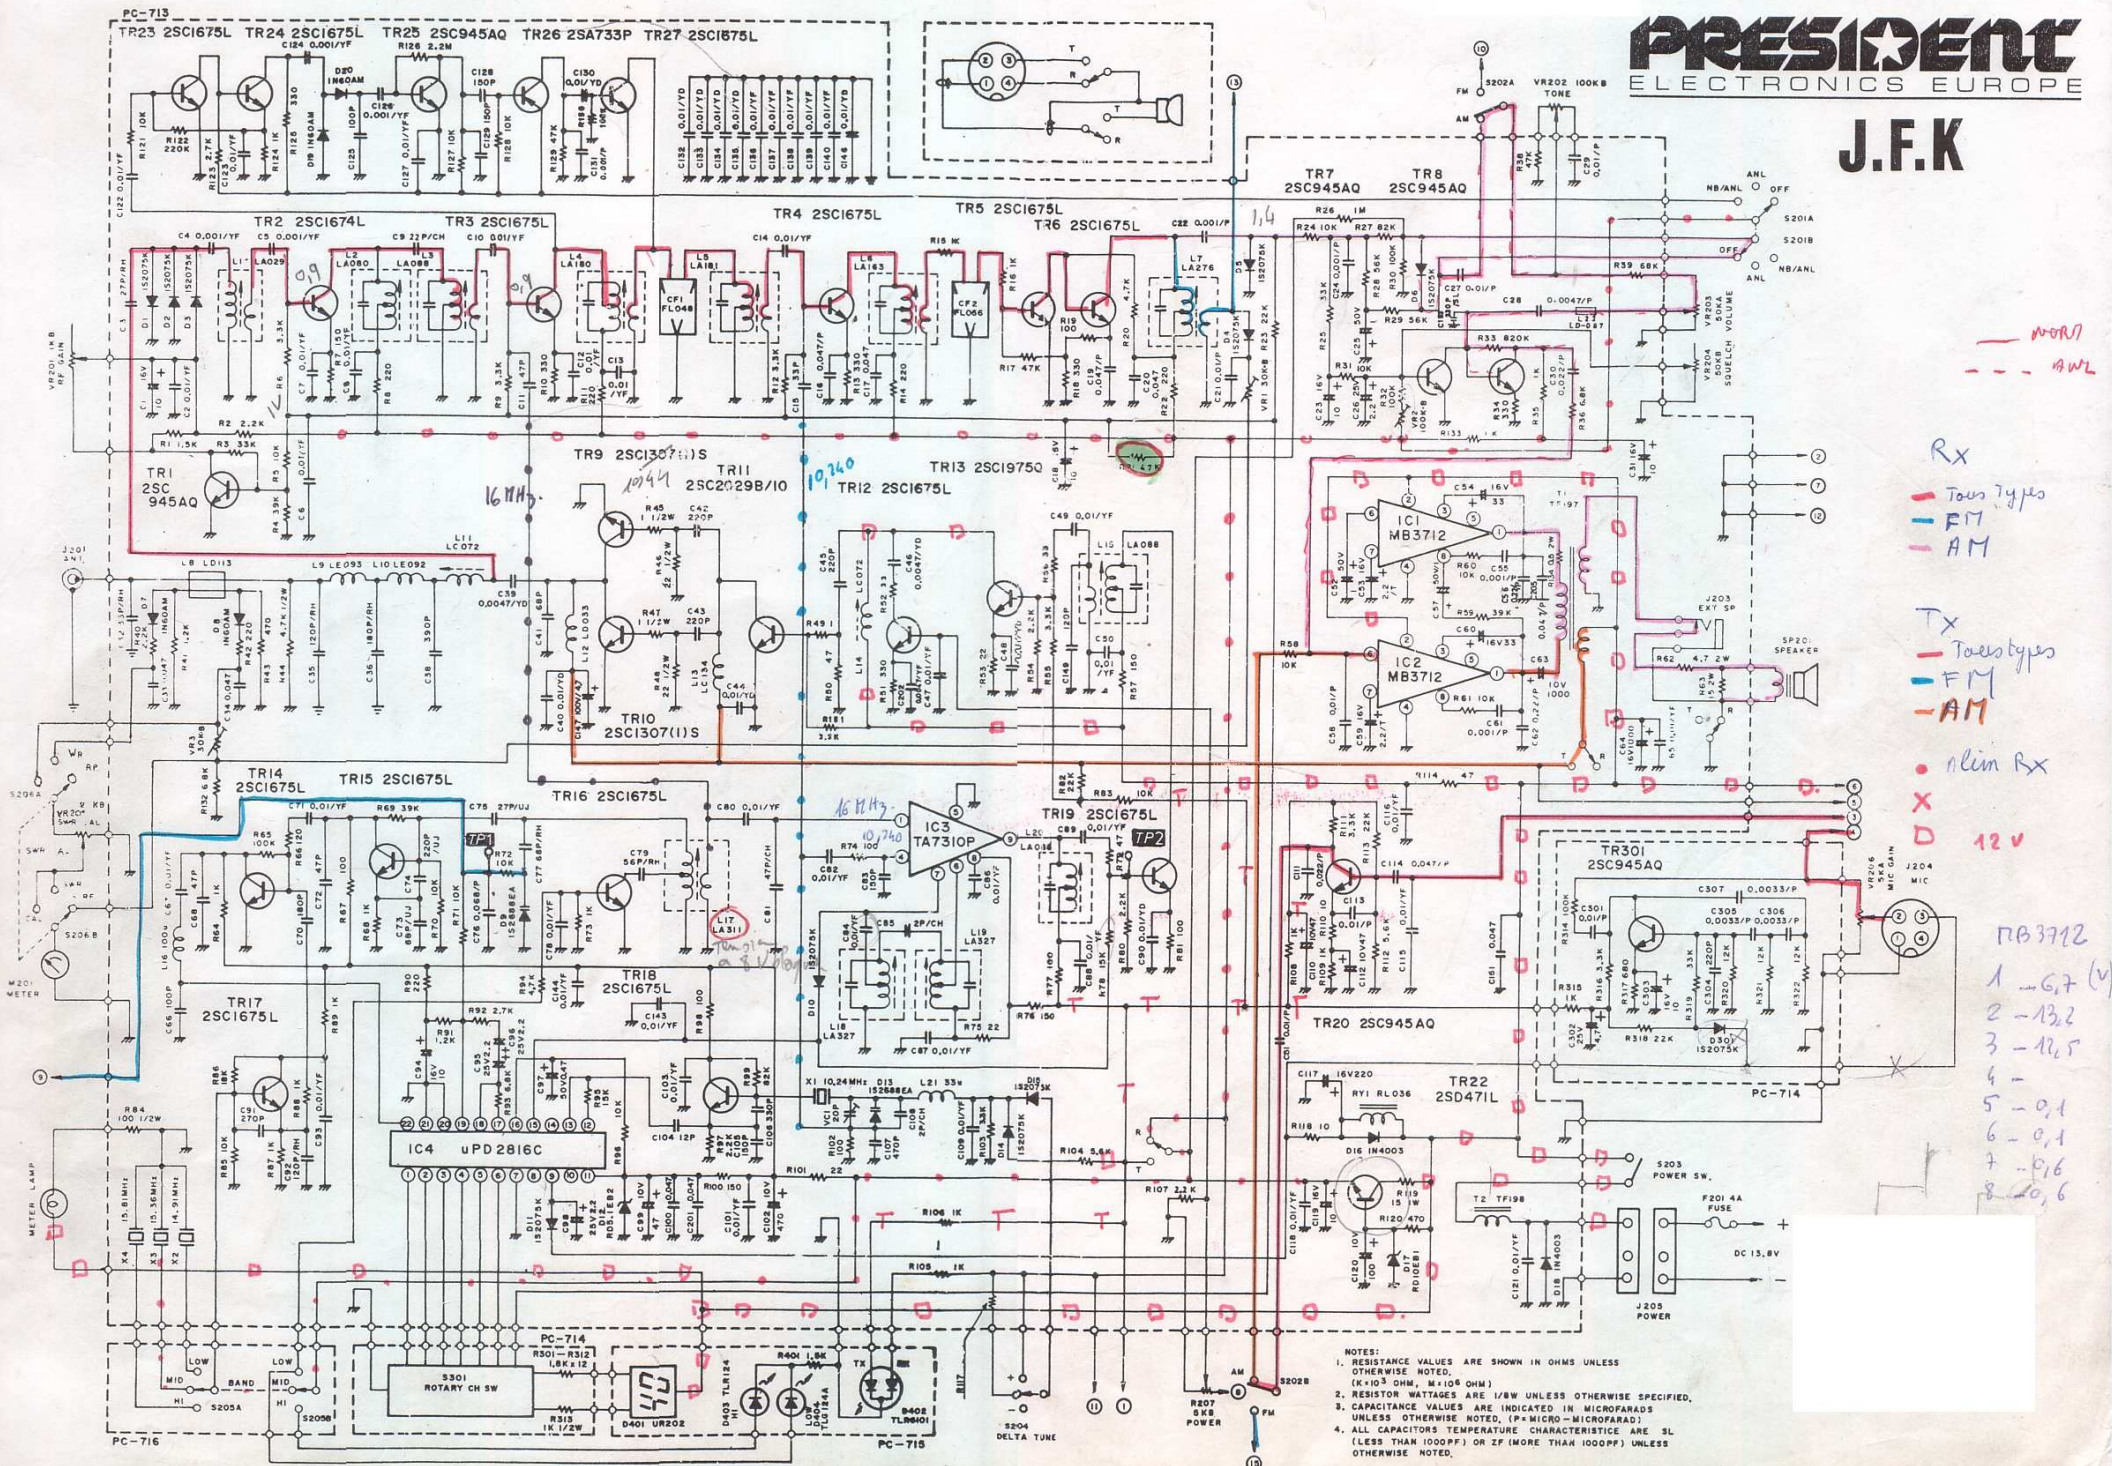

--- WORK
 - - - - - AWL
 Rx
 - Trans Types
 - FM
 - AM
 Tx
 - Trans types
 - FM
 - AM
 • 12V
 X
 D
 PB3712
 1 - G,7 (V)
 2 - 13,2
 3 - 12,5
 4 -
 5 - 0,1
 6 - 0,1
 7 - 0,16
 8 - 0,6

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.
(K=10³ OHM, M=10⁶ OHM)
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED, (P=MICRO-MICROFARAD).
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTIC ARE 5L (LESS THAN 1000PF) OR ZF (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.